


IG-52GM

03&04 TYPE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/3~1/4	53.0	1/43~1/113	84.0
1/12~1/26	68.5	1/150~1/936	99.5

外形尺寸 APPEARANCE SIZE

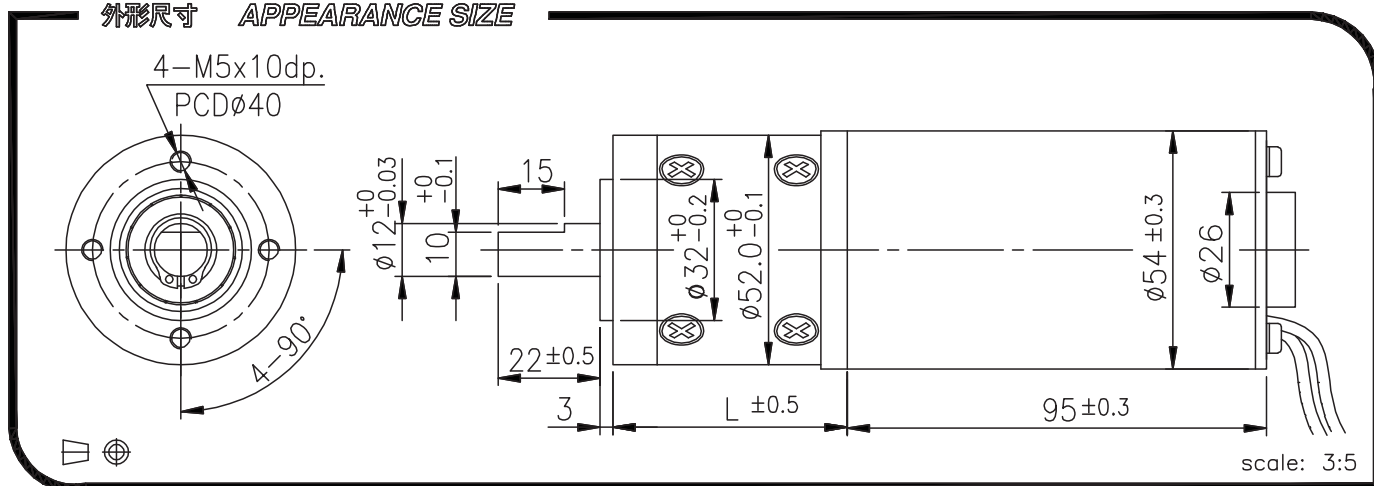

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1/3	1/4	1/12	1/15	1/19	1/26	1/43	1/53	1/66	1/81	1/100	1/113	1/150	1/230	1/285	1/353	1/488	1/546	1/676	1/936	
		12V	2.5	3.1	7.7	9.5	11.8	16	23	28	35	44	54	60	67	100	100	100	100	100	100	100
	定額扭力(Kg-cm) Rated torque																					
	定額回轉數(rpm) Rated speed	1030	835	295	238	192	139	84	68	55	44	36	32	24	15.5	12.8	10.4	7.6	6.7	5.6	4.0	
24V	3.6	4.5	11	13.5	17	23	33	41	51	62	78	88	97	100	100	100	100	100	100	100	100	
	定額回轉數(rpm) Rated speed	1000	815	285	230	185	136	82	67	54	44	35	31	23.5	15.6	12.9	10.5	7.7	6.8	5.7	4.1	

馬達單體型式 / MOTOR DATTA

定額電壓 Rated volt (V)	定額扭力 Rated torque (g-cm)	定額回轉數 Rated speed (rpm)	定額電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定額出力 Rated output (W)	重量 Weight (g)
12	900	3620	≤ 4100	4000	≤ 1200	33.5	920
24	1300	3550	≤ 2850	4000	≤ 700	48.6	920

馬達單體特性圖 / MOTOR CHARACTERISTICS

