


IG-22CGM **NEW**

05&06 TYPE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/5	23.3	1/246~1/735	41.9
1/18~1/25	29.5	1/1079~1/3968	48.1
1/66~1/136	35.7		

外形尺寸 APPEARANCE SIZE

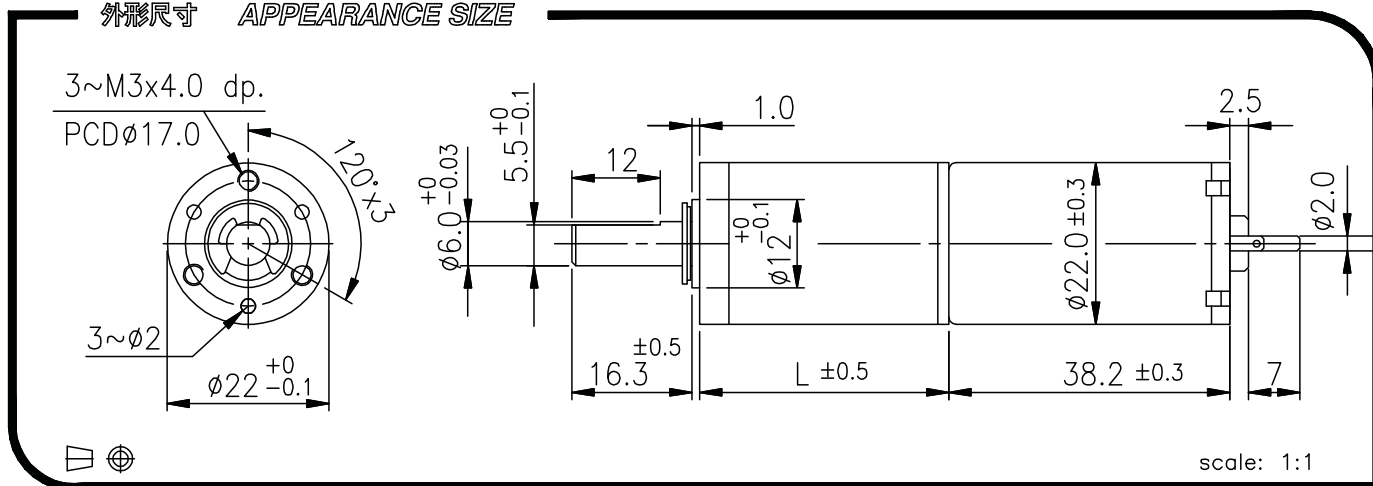

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1/5	1/18	1/20	1/25	1/66	1/77	1/90	1/110	1/136	1/246	1/336	1/393	1/484	1/597	1/735	1/1079	1/1475	1/2124	1/3968
		12V	260	850	1000	1200	2700	3200	3700	4000	4000	5000	5000	5000	5000	5000	5000	6000	6000	6000
	定格扭力(g-cm) Rated torque	1500	400	340	280	105	92	79	64	52	29.4	22.4	19.6	16.0	12.9	10.5	7.4	5.5	4.0	2.0
	定格回轉數(rpm) Rated speed	260	850	1000	1200	2700	3200	3700	4000	4000	5000	5000	5000	5000	5000	6000	6000	6000	6000	6000
24V	定格扭力(g-cm) Rated torque	1550	410	350	290	110	95	81	67	56	31	23	20	16.3	13.1	10.7	7.5	5.6	4.0	2.0
	定格回轉數(rpm) Rated speed																			

馬達單體型式 / MOTOR DATA

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	70	7100	≤ 700	9000	≤ 190	5.1	51
24	70	7400	≤ 360	9000	≤ 120	5.3	51

馬達單體特性圖 / MOTOR CHARACTERISTICS

