


# IG-22CGM

## 01&02 TYPE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/5	23.3	1/246~1/735	41.9
1/18~1/25	29.5	1/1079~1/3968	48.1
1/66~1/136	35.7		

外形尺寸 APPEARANCE SIZE

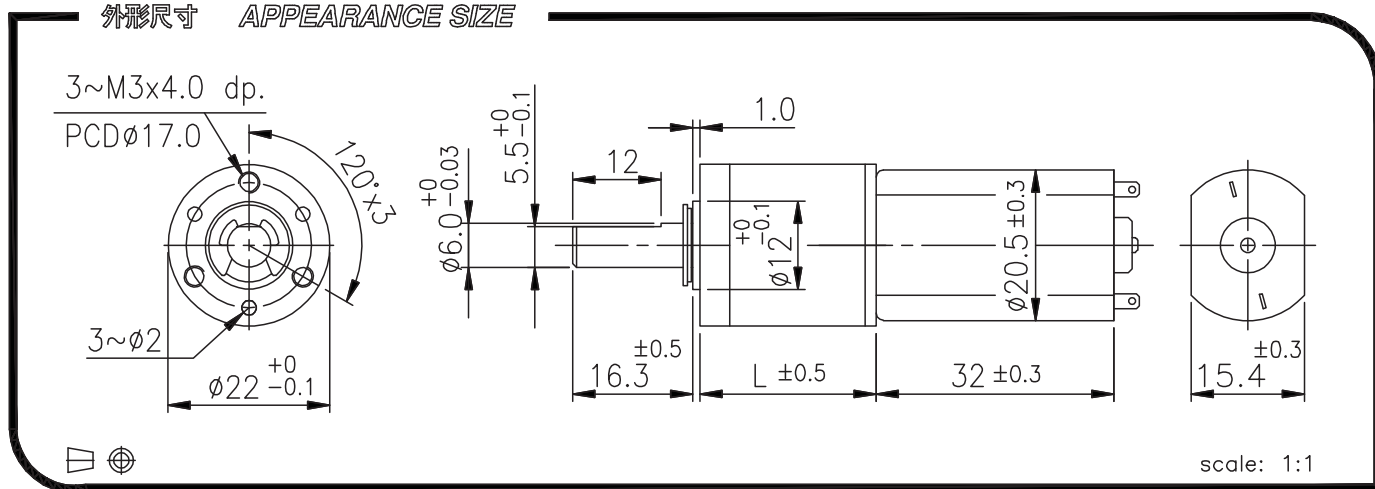

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1/5	1/18	1/20	1/25	1/66	1/77	1/90	1/110	1/136	1/246	1/336	1/393	1/484	1/597	1/735	1/1079	1/1475	1/2124	1/3968
		12V	80	270	310	380	850	1000	1150	1400	1700	2600	3700	4200	5000	5000	5000	6000	6000	6000
	定格扭力(g-cm) Rated torque	1400	375	325	260	101	86	74	60	48	26	19	16	13.8	11.5	9.5	6.7	5.0	3.4	1.8
	定格回轉數(rpm) Rated speed	80	270	310	380	850	1000	1150	1400	1700	2600	3700	4200	5000	5000	5000	6000	6000	6000	6000
24V	80	270	310	380	850	1000	1150	1400	1700	2600	3700	4200	5000	5000	5000	6000	6000	6000	6000	6000
	定格扭力(g-cm) Rated torque	1550	414	355	290	110	95	82	66	53	29	21	18	15.3	12.7	10.5	7.4	5.5	3.9	1.95
	定格回轉數(rpm) Rated speed																			

馬達單體型式 / MOTOR DATA

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	22	6700	≤ 200	8000	≤ 70	1.5	32.0
24	22	7400	≤ 110	9000	≤ 40	1.7	32.0

馬達單體特性圖 / MOTOR CHARACTERISTICS

