


# IG-38PGM

## 01&02 TYPE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/4~1/5	33.1	1/51~1/139	50.5
1/14~1/27	41.8	1/189~1/721	59.2

外形尺寸 APPEARANCE SIZE

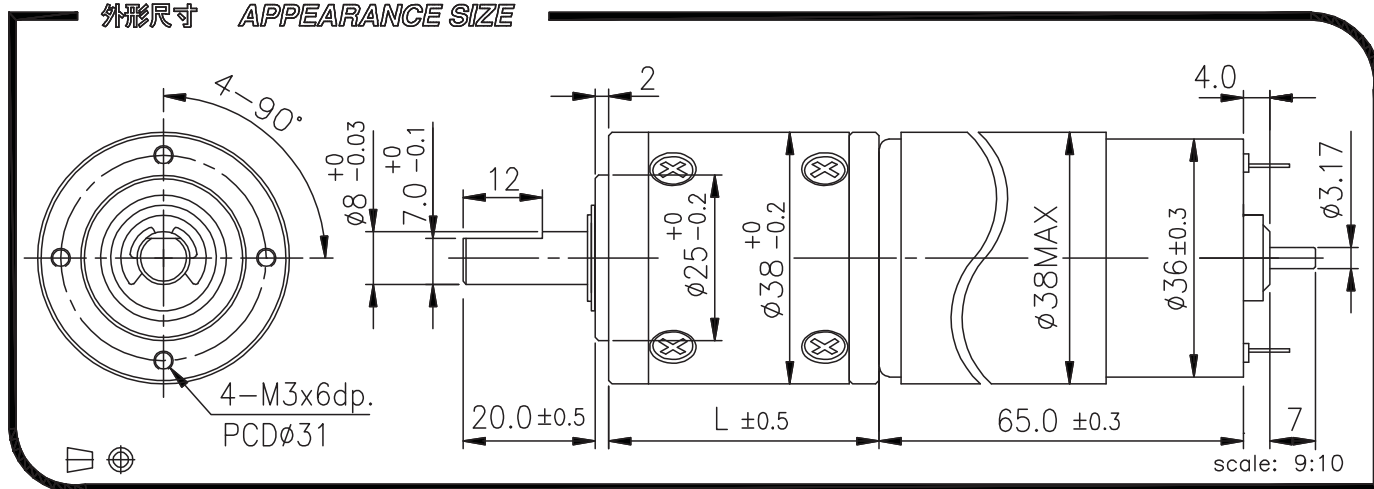

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1/5	1/14	1/19	1/27	1/51	1/71	1/100	1/139	1/189	1/264	1/516	1/721				
		12V	1.0	2.4	3.3	4.7	7.6	10	15	20	23	25	30	30			
	定額扭力(Kg-cm) Rated torque																
	定額回轉數(rpm) Rated speed	1100	420	300	210	110	81	58	41	30	22.5	11.6	8.4				
24V	1.1	2.7	3.7	5.2	8.5	12	16	20	25	25	30	30					
	定額扭力(Kg-cm) Rated torque																
	定額回轉數(rpm) Rated speed	1050	390	280	200	105	76	55	41	29	22.5	11.6	8.4				

馬達單體型式 / MOTOR DATA

定額電壓 Rated volt (V)	定額扭力 Rated torque (g-cm)	定額回轉數 Rated speed (rpm)	定額電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定額出力 Rated output (W)	重量 Weight (g)
12	250	5800	≤ 1600	6400	≤ 300	14.89	264
24	280	5500	≤ 900	6400	≤ 160	15.81	266

馬達單體特性圖 / MOTOR CHARACTERISTICS

