


# IG-16GM

## 04&05 TYPE

REDUCTION RATIO	L	REDUCTION RATIO	L
1/4~1/5	15.05	1/198~1/850	26.00
1/14~1/29	18.70	1/867~1/4592	29.65
1/53~1/157	22.35		



外形尺寸 APPEARANCE SIZE

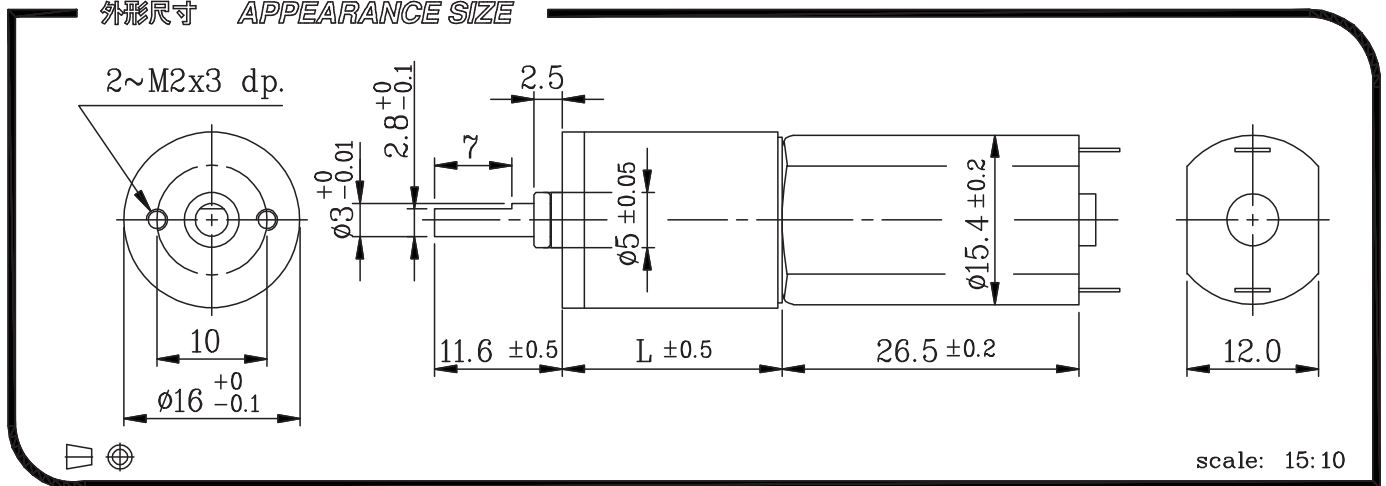

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
		4	14	19	29	62	72	84	104	128	157	231	316	370	455	561	690	1014	1621	1996	3027
12V	定格扭力(g-cm) Rated torque	21	60	82	120	220	260	300	380	460	550	700	950	1100	1350	1700	2000	2400	2400	2400	2400
	定格回轉數(rpm) Rated speed	1330	430	315	205	100	85	73	59	48	39	26	19	16	13.5	11	8.9	6	3.8	3.2	2.3
24V	定格扭力(g-cm) Rated torque	31	85	120	180	330	380	450	560	690	850	1000	1400	1600	2000	2000	2400	2400	2400	2400	2400
	定格回轉數(rpm) Rated speed	2400	760	555	365	170	150	130	105	85	69	47	34	29	24	19.5	15.9	11	7.2	6.1	4.1

馬達單體型式 / MOTOR DATA

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	6.1	6200	≤ 85	8000	≤ 50	0.394	18
24	9.0	11000	≤ 90	13500	≤ 50	1.026	18

馬達單體特性圖 / MOTOR CHARACTERISTICS

