


IG-90GM

01&02 TYPE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/4	57.3	1/201~1/517	106.8
1/15~1/19	73.8		
1/52~1/98	90.3		

外形尺寸 APPEARANCE SIZE

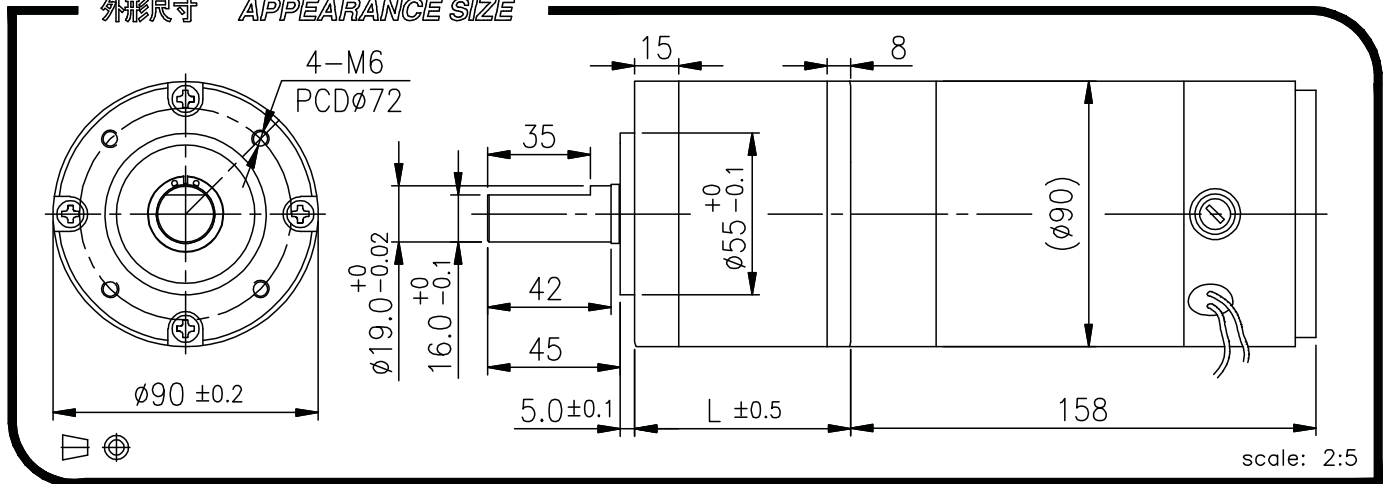

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1/4	1/15	1/19	1/52	1/60	1/77	1/98	1/201	1/294	1/403	1/517							
		12V	10	37	48	115	132	150	150	180	180	180	180	180					
	定格扭力(Kg-cm) Rated torque																		
	定格回轉數(rpm) Rated speed	500	123	96	34	31	24	19	9.2	6.4	4.6	3.6							
24V	定格扭力(Kg-cm) Rated torque	12	42	55	130	150	150	180	180	180	180	180							
	定格回轉數(rpm) Rated speed	510	127	99	35	31	25	20	9.4	6.5	4.7	3.7							

馬達單體型式 / MOTOR DATA

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	3700	1800	≤ 8300	2000	≤ 1500	68.4	2150
24	4200	1860	≤ 3900	2000	≤ 950	80.0	2150

馬達單體特性圖 / MOTOR CHARACTERISTICS

